



### Overview

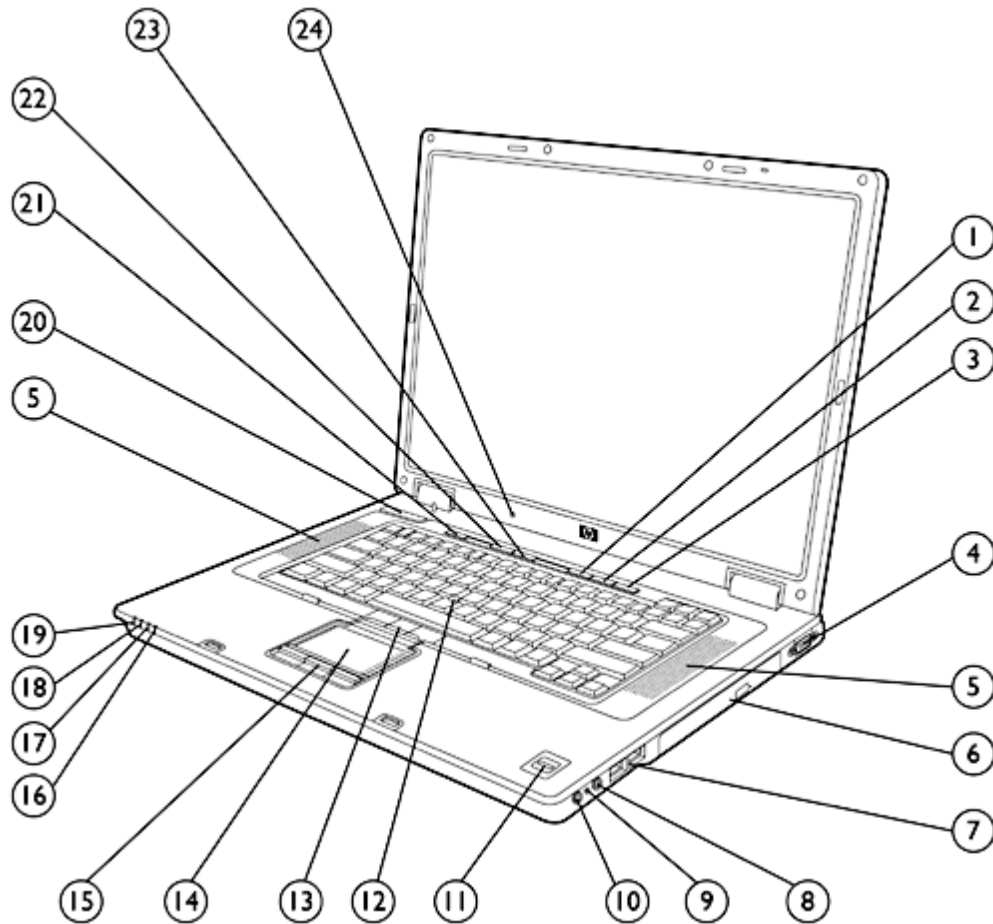

- |   |                                     |
|---|-------------------------------------|
| 1. Volume Mute Button with LED              | 13. Pointstick Buttons              |
| 2. Volume Down Button                       | 14. Touchpad with scroll zone       |
| 3. Volume Up Button                         | 15. Touchpad Buttons                |
| 4. Serial Port                              | 16. Hard Drive Activity LED         |
| 5. Stereo Speakers                          | 17. Battery Charging LED            |
| 6. Integrated Optical Drive                 | 18. Power/Standby LED               |
| 7. 2 USB 2.0 Ports                          | 19. Wireless On/Off LED             |
| 8. Microphone Jack                          | 20. Power Button with LED           |
| 9. Integrated Microphone                    | 21. HP Info Center Button           |
| 10. Headphone Jack                          | 22. Wireless On/Off Button with LED |
| 11. Biometric Fingerprint Sensor (optional) | 23. Presentation Mode Button        |
| 12. Pointstick                              | 24. Ambient Light Sensor            |

### Overview

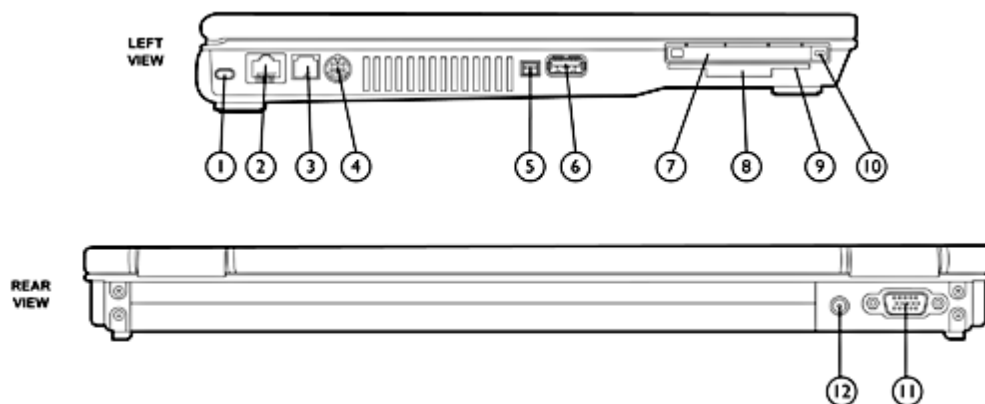

- |                         |                                 |
|-------------------------|---------------------------------|
| 1. Kensington Lock Slot | 7. PC Card Slot                 |
| 2. RJ-45 Port (NIC)     | 8. SD Media Slot                |
| 3. RJ-11 Port (Modem)   | 9. Integrated Smart Card Reader |
| 4. S-Video TV Out       | 10. PC Card Eject Button        |
| 5. IEEE 1394a Port      | 11. VGA/External Monitor Port   |
| 6. USB 2.0 Port         | 12. Power Connector             |

### At A Glance

- Genuine Windows XP Professional, FreeDOS
- Sleek light-weight design starting at 5.95 lb (2.7 kg) and 1.1 inch (28 mm) thin at front
- Intel® Core™ Duo and Intel Core 2 Duo processors \*
- 15.4-inch wide screen display
- ATI Mobility FireGL V5200 graphics controller with 256 MB of discrete video memory
- Up to 4GB of 533- or 667-MHz DDR2 SDRAM, dual channel memory support
- Up to 120-GB 5400 rpm, user-removable hard drive
- Optional 802.11 a/b/g or 802.11 b/g wireless LAN modules and optional Bluetooth®
- IEEE 1394a Port
- Integrated SD Media Reader
- Security features include integrated Smart Card Reader, TPM Embedded Security Chip, and optional Biometric Fingerprint Sensor
- Broadcom NetXtreme Gigabit Ethernet PCI Express Controller
- Certified for RedHat Enterprise Linux 4
- ISV certifications for popular MCAD, DCC, and GIS applications
- Protected by 3/3/3 standard parts and labor warranty – certain restrictions and exclusions apply.

\* Intel's numbering system is not a measurement of higher performance.

### Standard Features

#### Processors

Intel Core 2 Duo Processor T7600 (2.33-GHz, 667-MHz FSB, 4-MB L2 cache)\*  
 Intel Core 2 Duo Processor T7400 (2.16-GHz, 667-MHz FSB, 4-MB L2 cache)\*  
 Intel Core 2 Duo Processor T7200 (2.0-GHz, 667-MHz FSB, 4-MB L2 cache)\*  
 Intel Core 2 Duo Processor T5600 (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)\*  
 Intel Core Duo processor T2600\* (2.16-GHz, 667-MHz FSB, 2-MB L2 cache)  
 Intel Core Duo processor T2500\* (2.00-GHz, 667-MHz FSB, 2-MB L2 cache)  
 Intel Core Duo processor T2400\* (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)

\* Intel's numbering is not a measurement of higher performance.

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

#### Operating System

##### Preinstalled

Genuine Windows XP Professional SP2  
 FreeDOS

##### Supported

Genuine Windows 2000 (drivers downloadable from <http://www.hp.com>)

##### Certified

SUSE Linux Enterprise Desktop 10 for x86  
 Novell Linux Desktop 9 SP3 for x86

##### Windows Vista Capable

Not all Windows Vista features are available for use on all Windows Vista Capable PCs. All Windows Vista Capable PCs will run the core experiences of Windows Vista, such as innovations in organizing and finding information, security, and reliability. Some features available in premium editions of Windows Vista -- like the new Windows Aero™ user interface -- require advanced or additional hardware.  
 Check <http://www.windowsvista.com/getready> for details.

#### Chipset

Mobile Intel 945PM Express Chipset with 667-MHz front side bus

#### Graphics

ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory  
 Microsoft DirectX 9 capable

#### Display

##### Internal

15.4-inch WSXGA+ wide viewing angle display with 1680 x 1050 resolution and 16M colors  
 15.4-inch WUXGA wide viewing angle display with 1920 x 1200 resolution and 16M colors  
 Ambient light sensor

##### External

Up to 32-bit per pixel color depth  
**VGA** port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz  
**DVI** port in optional HP Docking Station (sold separately) supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking

**NOTE:** Resolutions are dependent upon monitor capability, and resolution and color depth settings.

### Standard Features

Memory	Standard	512-MB, 1024-MB or 2048-MB 533-MHz or 667-MHz DDR2 SDRAM SODIMMs; two SODIMM slots supporting dual channel memory
	Maximum	Upgradeable to 4096-MB maximum (2048-MB SODIMM in slots 1 and 2)
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

**NOTE:** Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Above 3-GB, all memory may not be available due to system resource requirements.

Communications	Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC*) with HP Smart Power NIC Technology	
	56K V.92 modem** with digital line guard	
	<p>* The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.</p> <p>** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.</p>	

Wireless Devices	Support for a broad range of secure, integrated wireless LAN options featuring support for the latest industry standards. Integrated Bluetooth is also an option (factory configurable only) and can be combined with any one of the supported wireless LAN options.	
	All integrated wireless LAN options	Wi-Fi certified Cisco Compatible Extensions support (Version 4.0) Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support WiFi Certified for WPA2, WMM Dual antennas integrated in the display enclosure
	Intel PRO/Wireless 3945ABG Network Connection	Intel Centrino mobile technology Integrated support for 802.11a, b and g Up to 54-mbps data rate
	Broadcom 4311AG WiFi Adapter	Integrated support for 802.11a, b and g Up to 54-mbps data rate
	Broadcom 4311BG WiFi Adapter	Integrated support for 802.11 b and g Up to 54-mbps data rate
	HP Integrated Module with Bluetooth 2.0 Wireless Technology	Bluetooth Specification v2.0 compliant Works with a wide range of Bluetooth devices

### Standard Features

<b>Keyboard</b>	The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19-mm x 19-mm key pitch (center-to-center spacing), 2.5-mm stroke, comfort-dished keycaps, and bright key legends for improved visibility in low light conditions.	
<b>One-Touch Productivity Buttons</b>	Provide one-touch access to the following features: Wireless On/Off, HP Info, Presentation, Volume down, Volume up, and Volume Mute.	
<b>Pointing Device</b>	Dual pointing devices – Touchpad with scroll zone and three soft-touch buttons and Pointstick with three soft-touch buttons	
<b>Expansion Card Slots</b>	<b>One Type I/II PC Card slot</b>	Supports 32-bit CardBus and 16-bit PC Cards
	<b>One Integrated Smart Card Reader</b>	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
<b>Media Slots</b>	<b>One integrated Secure Digital slot</b>	Supports SD (Secure Digital) and MMC (MultiMedia Card) media
<b>Storage</b>	<b>Hard Drives</b>	60-, 80-, 100-, 120-GB 5400 rpm SMART SATA 80-, 100-GB 7200 rpm SMART SATA
	<b>NOTE:</b> These hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 8 GB is reserved for the system recovery software.	
	<b>HP Mobile Data Protection System 3D</b>	Hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration.
	<b>Fixed Optical Drives</b>	DVD/CD-RW Combo DVD+/-RW SuperMulti with Double Layer LightScribe DVD+/-RW with Double Layer

## Standard Features

Interfaces	PC Card Slot	One – Type I/II
	Smart Card Reader	One
	External Monitor	One – VGA
	External Microphone	One
	Headphone/Line out	One
	Power Connector	One
	RJ-11 (Modem)	One
	RJ-45 (NIC)	One
	Ambient Light Sensor	One
	Serial Port	One
	IEEE 1394a Port (4-pin)	One
	S-Video TV Out	One (Support for NTSC/PAL)
	USB 2.0	Three
	Docking Connector	One
	Accessory Battery Connector	One
	LED Status Indicators	Eleven

Audio	ADI High Definition CODEC
	Integrated 16-bit Sound Blaster Pro compatible audio
	Integrated stereo speakers
	Integrated directional microphone
	External volume up, volume down, and mute buttons
	Stereo headphone/line out
	Stereo microphone in

Software	<b>Preinstalled Software</b>	Adobe Acrobat Reader
	<b>Microsoft Windows XP</b>	HP Backup and Recovery Manager
		HP Help and Support Center
		HP Mobile Print Driver
		HP ProtectTools Security Manager:
		BIOS Configuration for HP ProtectTools
		Embedded Security for HP ProtectTools
		Credential Manager for HP ProtectTools
		HP Quick Launch Buttons
		HP Wireless Assistant
		HP OpenView Radia Management Solutions
		HP Performance Tuning Framework
		Sonic Digital Media Plus:
		RecordNow! (for optional DVD+/-RW and DVD/CDRW drives)
		MyDVD (DVD Authoring for optional DVD+/-RW drives)
		Synaptics Touchpad Driver
		Symantec Norton Internet Security with complimentary 60-day live update
		Intervideo WinDVD – DVD Player (for optional DVD+/-RW, DVD/CDRW and DVD drives)
	<b>Additional software available from the Web</b>	HP Client Manager Software
		Smart Card Security for HP ProtectTools
		Device Access Manager for HP ProtectTools

## Standard Features

### Workstation ISV Certifications

**MCAD**  
(Mechanical  
CAD/Architectural  
Engineering and  
Construction)

AutoDesk AutoCAD  
AutoDesk Inventor  
AutoDesk Revit  
Bentley Microstation  
Dassault Catia V5  
UGS I-DEAS NX 10  
UGS I-DEAS NX 11  
UGS/PLM Unigraphics NX, NX2, NX3  
PTC Pro/E 2001 Mechanical  
PTC Pro/E Wildfire Mechanical  
MSC.Patran  
UGS Solidedge  
Solidworks  
ICEM Surf  
CoCreate OneSpace Designer  
SensAble  
PTC DV Mockup

**DCC**  
(Digital Content Creation)

Discreet 3DS MAX/Combustion  
Alias Maya  
Alias Studio Tools  
Avid SoftImage XSI/3D  
Avid Express Pro  
Adobe Premiere/After Effects

**GIS**  
(Geographic Information  
Systems)

ESRI ArcGIS 9

**Oil and Gas**

SMT  
Landmark/GeoGrpahix  
EDS  
Roxar  
Schlumberger/Petrel

### HP Backup and Recovery Manager

Each unit is shipped with HP Backup and Recovery Manager. HP Backup and Recovery Manager can provide data and system file protection for HP business PCs to enable fast recovery if the system becomes corrupted or if important information is accidentally deleted. HP Backup and Recovery Manager can perform scheduled or manual backups of the entire drive or individual files and folders. Up to 8 GB is reserved for the system recovery software. HP Backup and Recovery Manager can also create software recovery CDs or DVDs (requires optional hardware).

### HP OpenView Radia Management Solutions

HP OpenView Radia Management Solutions automate the management of software such as operating systems, software, software updates, content, and configuration settings to ensure that each computer is maintained in the correct configuration.

### HP Client Management Interface

HP Client Management Interface is based on industry standards that include Microsoft Windows Management Interface (MS WMI), Web Based Enterprise Management (WBEM), System Management BIOS (SMBIOS), and Advanced Configuration and Power Interface (ACPI). HP CMI is a foundation technology utilized in HP Client Management Solutions.

### Standard Features

#### SMBIOS Version 2.4

System Management BIOS, previously known as DMI BIOS, is used to store system management information.

#### HP ProtectTools Security Manager

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available or planned are:

- Smart Card Security for HP ProtectTools
- BIOS Configuration for HP ProtectTools
- Embedded Security for HP ProtectTools
- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools

### Security

#### Standard Features

HP ProtectTools Security Manager  
 Configuration Control Hardware  
 Memory Change Alert  
 Ownership Tag  
 Setup Password  
 Power-On Password  
 DriveLock  
 TPM Enhanced DriveLock  
 HP Disk Sanitizer  
 Kensington Lock Slot  
 Support for Computrace / LoJack for Laptops (must be purchased separately)

#### Integrated Smart Card Reader

Compatible with ISO 7816 compliant Smart Cards  
 PC/SC interface support

#### TPM 1.2 Embedded Security Chip

Designed to the Trusted Computing Group (TCG) standard  
 Microsoft Crypto API and PKCS#11 software interface support  
 RSA Secured Partner program certification  
**NOTE:** Full functionality of the TPM Embedded Security Chip is available only with Windows XP Professional.

#### Optional Features

#### Biometric Fingerprint Sensor

For more information on HP security solutions refer to <http://www.hp.com/go/security>.

### Power Supply

External 90-watt AC adapter, 6-foot (1.8-meter) power cord included.  
 Total length including External AC adapter is 12 feet (3.66 meter).  
 HP Fast Charge Technology\*

\*Fast Charge Technology recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 12-cell Ultra-Capacity batteries.



### Standard Features

Battery	Primary Battery	8-cell (69Wh) high capacity Lithium-Ion
	Optional 8-Cell Extended Life Battery	8-cell (52Wh) high capacity Lithium-Ion
	Optional HP 12-Cell Ultra-Capacity Battery	12-cell (95Wh) high capacity Lithium-Ion
Battery Life	Primary Battery	Up to 4 hours
	Primary Battery and optional HP 8-Cell Extended Life Battery	Up to 7 hours
	Primary Battery and optional HP 12-Cell Ultra-Capacity Battery	Up to 9 hours and 30 minutes
	<b>NOTE:</b> Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.	
System Standby Time	Up to 2 weeks	
Power Conservation	Supports enhanced Intel SpeedStep technology with Intel Core Duo processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)	
	ATI PowerPlay technology	
	HP Smart Power NIC technology	
	Hibernation	
	Standby	
	ACPI compliance	
Docking	HP Docking Station	
	HP Advanced Docking Station	
	HP's shared docking solutions provide simple and convenient port replication and cable management. Features include Gigabit NIC pass through, modem pass through, legacy parallel and serial ports, DVI, S-video TV out, USB 2.0 ports, integrated security mechanism*, integrated MultiBay II and ExpressCard slots.** These docking solutions are compatible across multiple Business Notebook platforms enabling a lower total cost of ownership.	
	* HP/Kensington Cable Lock required (purchased separately)	
	** HP Advanced Docking Station only	
Service and Support	HP Services includes a three-year standard parts and labor on-site warranty and toll-free 7 x 24 hardware technical phone support. Warranty upgrades are also available.	
	<b>NOTE:</b> Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <a href="http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp">http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp</a> .	

### Standard Features

nw8440  
EY695AA#ABA  
Smart Buy

Processor	Intel Core Duo processor T2500* (2.00-GHz, 667-MHz FSB, 2-MB L2 cache)
Operating System	Genuine Windows XP Professional Edition
System Memory	1-GB 533-MHz DDR2 SDRAM (1 DIMM)
Hard Drive	80-GB 5400 rpm SATA
Optical Drive	DVD+/-RW SuperMulti with Double Layer (Fixed)
Display	15.4-inch WSXGA+ wide viewing angle display (1680 x 1050 resolution and 16M colors)
Graphics	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
Communications	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g
Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
Battery	8-cell high capacity Lithium-Ion (69Wh)
Power	External 90W AC adapter
Warranty	3/3/3

nw8440  
EY696AA#ABA

Processor	Intel Core Duo processor T2600* (2.16-GHz, 667-MHz FSB, 2-MB L2 cache)
Operating System	Genuine Windows XP Professional Edition
System Memory	1-GB 533-MHz DDR2 SDRAM (1 DIMM)
Hard Drive	80-GB 5400 rpm SATA
Optical Drive	DVD+/-RW SuperMulti with Double Layer (Fixed)
Display	15.4-inch WSXGA+ wide viewing angle display (1680 x 1050 resolution and 16M colors)
Graphics	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
Communications	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
Battery	8-cell high capacity Lithium-Ion (69Wh)
Power	External 90W AC adapter
Warranty	3/3/3

### Standard Features

nw8440  
EY694AA#ABA

<b>Processor</b>	Intel Core Duo processor T2600* (2.16-GHz, 667-MHz FSB, 2-MB L2 cache)
<b>Operating System</b>	Genuine Windows XP Professional Edition
<b>System Memory</b>	1-GB 667-MHz DDR2 SDRAM (1 DIMM)
<b>Hard Drive</b>	80-GB 7200 rpm SATA
<b>Optical Drive</b>	DVD+/-RW SuperMulti with Double Layer (Fixed)
<b>Display</b>	15.4-inch WUXGA wide viewing angle display (1920 x 1200 resolution and 16M colors)
<b>Graphics</b>	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
<b>Audio</b>	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
<b>Communications</b>	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
<b>Integrated Wireless</b>	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
<b>Integrated Security</b>	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
<b>Pointing Device</b>	Dual pointing devices (both Pointstick and Touchpad)
<b>Battery</b>	8-cell high capacity Lithium-Ion (69Wh)
<b>Power</b>	External 90W AC adapter
<b>Warranty</b>	3/3/3

nw8440  
EY697AA#ABA

<b>Processor</b>	Intel Core Duo processor T2600* (2.16-GHz, 667-MHz FSB, 2-MB L2 cache)
<b>Operating System</b>	Genuine Windows XP Professional Edition
<b>System Memory</b>	2-GB 533-MHz DDR2 SDRAM (1 DIMM)
<b>Hard Drive</b>	100-GB 7200 rpm SATA
<b>Optical Drive</b>	DVD+/-RW SuperMulti with Double Layer (Fixed)
<b>Display</b>	15.4-inch WUXGA wide viewing angle display (1920 x 1200 resolution and 16M colors)
<b>Graphics</b>	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
<b>Audio</b>	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
<b>Communications</b>	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
<b>Integrated Wireless</b>	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
<b>Integrated Security</b>	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
<b>Pointing Device</b>	Dual pointing devices (both Pointstick and Touchpad)
<b>Battery</b>	8-cell high capacity Lithium-Ion (69Wh)
<b>Power</b>	External 90W AC adapter
<b>Warranty</b>	3/3/3

### Standard Features

nw8440 RB556UT#ABA Smart Buy	Processor	Intel Core 2 Duo Processor T7200 (2.0-GHz, 667-MHz FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows XP Professional Edition
	System Memory	1-GB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	80-GB 7200 rpm SATA
	Optical Drive	DVD+/-RW SuperMulti with Double Layer (Fixed)
	Display	15.4-inch WSXGA+ wide viewing angle display (1680 x 1050 resolution and 16M colors)
	Graphics	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	Battery	8-cell high capacity Lithium-Ion (69Wh)
	Power	External 90W AC adapter
	Warranty	3/3/3

nw8440 RB557UA#ABA	Processor	Intel Core 2 Duo Processor T7400 (2.16-GHz, 667-MHz FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows XP Professional Edition
	System Memory	1-GB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	80-GB 7200 rpm SATA
	Optical Drive	DVD+/-RW SuperMulti with Double Layer (Fixed)
	Display	15.4-inch WSXGA+ wide viewing angle display (1680 x 1050 resolution and 16M colors)
	Graphics	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	Battery	8-cell high capacity Lithium-Ion (69Wh)
	Power	External 90W AC adapter
	Warranty	3/3/3

### Standard Features

nw8440 RN040AW#ABA	Processor	Intel Core 2 Duo Processor T7400 (2.16-GHz, 667-MHz FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows XP Professional Edition
	System Memory	1-GB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	80-GB 7200 rpm SATA
	Optical Drive	DVD+/-RW SuperMulti with Double Layer (Fixed)
	Display	15.4-inch WUXGA wide viewing angle display (1920 x 1200 resolution and 16M colors)
	Graphics	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	Battery	8-cell high capacity Lithium-Ion (69Wh)
	Power	External 90W AC adapter
	Warranty	3/3/3

nw8440 RB558UA#ABA	Processor	Intel Core 2 Duo Processor T7600 (2.33-GHz, 667-MHz FSB, 4-MB L2 cache)*
	Operating System	Genuine Windows XP Professional Edition
	System Memory	2-GB 667-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	100-GB 7200 rpm SATA
	Optical Drive	DVD+/-RW SuperMulti with Double Layer (Fixed)
	Display	15.4-inch WUXGA wide viewing angle display (1920 x 1200 resolution and 16M colors)
	Graphics	ATI Mobility FireGL V5200 graphics controller with 256 MB of video memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (10/100/1000 NIC) with HP Smart Power NIC Technology
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
	Integrated Security	TPM 1.2 Embedded Security Chip HP Fingerprint Sensor
	Pointing Device	Dual pointing devices (both Pointstick and Touchpad)
	Battery	8-cell high capacity Lithium-Ion (69Wh)
	Power	External 90W AC adapter

Standard Features

Warranty 3/3/3

\*Intel's numbering system is not a measurement of higher performance.

### Options

Memory	512-MB 533-MHz DDR2 SDRAM	PE831A
	1-GB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM	EM993AA
	1-GB 667-MHz DDR2 SDRAM	EM994AA
	2-GB 667-MHz DDR2 SDRAM	EM995AA
MultiBay II Storage (9.5-mm) <b>NOTE:</b> Requires HP Advanced Docking Station or HP External MultiBay II	DVD-ROM MultiBay II Drive	PA849A
	Combo DVD/CD-RW MultiBay II Drive	PA850A
	DVD+/-RW SuperMultiwith Double Layer MultiBay II Drive	PA851A
	80-GB 5400 rpm MultiBay II Hard Drive	PH357A
Other Storage	80-GB 5400 rpm Primary SATA Hard Drive	ET354AA
	DVD+/-RW Double Layer Drive with LightScribe Upgrade (Available July 2006)	ET353AA
	HP USB Digital Drive + 256-MB Secure Digital Card	DL702AA
	HP USB Diskette Drive	DC361B
Communications	Intel PRO/Wireless 3945ABG 802.11 a/b/g WLAN option kit	EX150AA#ABA
Expansion Solutions	HP Docking Station	EN488AA#ABA
	HP Advanced Docking Station	EN489AA#ABA
	HP 3-in-1 NAS Docking Station	EM537AA#ABA
	HP Monitor Stand	PA507A
	HP Adjustable Notebook Stand	PA508A
	HP External MultiBay II (9.5-mm)	PA509A#ABA
	HP 4-port USB 2.0 Hub	DG954A
Power	HP 2-bay Battery Charging Station	DT533A#ABA
	HP 10-bay Battery Charging Station	DT534A#ABA
	Battery Adapter kit #1	PK402A
	90W Smart AC Adapter	ED495AA#ABA
	90W Smart Auto Adapter	ED493AA
	65W Air/Auto/AC Combo Adapter	ED993AA#ABA
	Primary 8-cell Battery Pack	PB992A
	HP 8-cell Extended Life Battery	PB993A
	HP 12-cell Ultra-Capacity Battery	EJ092AA

Options

Carrying Cases	HP Entry Value Case	DL617A
	HP Top Load Nylon Case	DC915A
	HP Executive Leather case	PA847A
	HP Sport Backpack	DG102A
Security	HP PCMCIA Smart Card Reader	DC350B
	HP/Kensington Cable Lock	PC766A
Input/Output Devices	USB/PS2 Keyboard	DC852A#ABA
	USB/PS2 Optical Mouse	DC369A
	HP USB Optical Travel Mouse	F2100A



Memory

Supports up to 4096 MB\* of 533-MHz or 667-MHz DDR2 SDRAM  
Two DIMM slots  
DIMM sizes supported: 512 MB, 1024 MB, and 2048 MB

- Standard Memory
- 512 MB (512 MB x 1)
  - 1024 MB (1024 MB x 1 or 512 MB x 2)
  - 2048 MB (1024 MB x 2)
  - 4096 MB\* (2048 MB x 2)

Optional Memory Upgrades

Support for up to 4096 MB\* of memory is available (with the installation of optional DDR2 SDRAM memory kits). Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
512 MB	512 MB	Empty
1024 MB	1024 MB	Empty
1024 MB	512 MB	512 MB
1536 MB	1024 MB	512 MB
2048 MB	1024 MB	1024 MB
4096 MB	2048 MB	2048 MB

**NOTE:** This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Memory Upgrades	512-MB 533-MHz DDR2 SDRAM	PE831A
	1024-MB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM	EM993AA
	1024-MB 667-MHz DDR2 SDRAM	EM994AA
	2048-MB 667-MHz DDR2 SDRAM	EM995AA

\* Above 3-GB, all memory may not be available due to system resource requirements.

### Storage

#### Removable Media Drive Support

	Quantity Supported	Drive Bay
LightScribe DVD+/-RW Drive with Double Layer	One	Fixed optical drive bay
DVD+/-RW SuperMulti Drive with Double Layer Drive	One	Fixed optical drive bay
DVD/CD-RW Combo Drive	One	Fixed optical drive bay

#### Hard Drive Support

	Quantity Supported	Drive Bay
<b>Primary Hard Drives</b>		
100-GB 7200 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 7200 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
120-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
100-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
60-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay

### Technical Specifications

System Unit	Dimensions (HxWxD)	1.1 in (at front) x 14.1 in x 10.2 in 28 mm (at front) x 358 mm x 259 mm
	Weight	5.95 lb (2.7 kg)
	<b>NOTE:</b> Height varies depending upon where on the notebook the measurement is made. Weight includes 8-cell battery, 60-GB hard drive, 512-MB memory, 802.11 wireless communications module, and TPM Embedded Security Chip. Weight varies by configuration and components.	
Stand-Alone Power Requirements	Normal Operating Voltage	19 V
	Average Operating Power	39 W
	Max Operating Power	< 90 W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	Blue Angel	No
	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	Energy Star Compliant	Yes
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
	UKRSERTCOMPUTER	Yes

### Technical Specifications

HP 90W Smart AC Adapter	Dimensions	5.24 x 2.28 x 1.1 in (13.3 x 5.8 x 2.9 cm)	
	Weight	0.86 lb (390 g)	
	Input	100 to 240 VAC	
		Input Efficiency	83% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version
			2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
	Output	Output power 65W	90W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
EMI and Safety Certifications	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF– over 200,000 hours at 25°C ambient condition.		
Option Kit Contents	90W AC Adapter, power cable, warranty booklet		
<hr/>			
Optional HP 12-Cell Ultra-Capacity Battery	Dimensions (H x W x L)	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)	
	Weight	1.77 lb (0.803 kg)	
	Cells/Type	12-cell Lithium-Ion	
	Energy	Voltage	14.8V
		Watt-hour Capacity	95Wh
		Amp-hour Capacity	6.45Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	Smart Adapter	3 to 4 hours
		System ON	4 to 5 hours (depending on system power consumption)
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	

Technical Specifications

Optional HP 8-Cell Extended Life Battery	Dimensions (H x W x L)	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)	
	Weight	1.00 lb (0.455 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Voltage	14.4V
		Watt-hour Capacity	52Wh
		Amp-hour Capacity	3.6Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	3 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery	

69Wh Primary 8-Cell Battery	Dimensions (H x W x L)	0.8 x 1.9 x 10.6 in (2.0 x 4.8 x 27.0 cm)	
	Weight	0.980 lb (0.445 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	Voltage	14.4V
		Watt-hour Capacity	69Wh
		Amp-hour Capacity	4.8Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (–10° to 60° C)
		Non-operating	–4° to 140° F (–20° to 60° C)
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF

Technical Specifications

15.4-inch Color TFT WUXGA Wide Viewing Angle Display	Dimensions (W x H)	13.0 x 8.1 in (33.1 x 20.7 cm)	
	Diagonal Size	15.4 in (39.1 cm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	170 nit (typical)	
	Pixel Resolution	Pitch	0.173 mm
		Format	1920 x 1200
		Configuration	RGB stripe
	Backlight	CCFL	
	PPI	147	
	Viewing Angle	±65° Horizontal, ± 50° Vertical (typical)	

15.4-inch Color TFT WSXGA+ Wide Viewing Angle Display	Active Area (W x H)	13.0 x 8.1 in (33.1 x 20.7 cm)	
	Diagonal Size	15.4 in (39.1 cm)	
	Surface Treatment	Anti-glare	
	Number of Colors	Up to 16M	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	170 nit (typical)	
	Pixel Resolution	Pitch	0.197 mm
		Format	1680 x 1050
		Configuration	RGB stripe
	Backlight	CCFL	
	PPI	129	
	Viewing Angle	±65° Horizontal, ± 50° Vertical (typical)	

Hard Drives

### Technical Specifications

100-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	100 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	195,371,568	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

80-GB 7200 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1 ms
		Average	10 ms
		Maximum	18 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

120-GB 5400 rpm SATA	Drive Weight	0.25 lb (113 g)	
	Capacity	120 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	12 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	234,441,648	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

### Technical Specifications

100-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	100 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	195,371,568	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

80-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

60-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	60 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	117,231,408	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	



## Technical Specifications

### Fixed Optical Drives

DVD/CD-RW Combo Drive	Access Times	Random	<110 ms CD <130 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		24X CD-RW	3,600 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW	
	Max Media Capacity (read)	8.5 GB	
LightScribe DVD+/-RW Drive with Double Layer	Max Media Capacity (write)	700 MB	
	Transport	Tray loading	

LightScribe DVD+/-RW Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		16X CD-RW	2,400 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
	Transfer Mode	Multiword DMA Mode 2	
LightScribe DVD+/-RW Drive with Double Layer	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, LightScribe	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	

### Technical Specifications

	Transport	Tray Loading	
DVD+/-RW SuperMulti Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		16X CD-RW	2,400 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
		5X DVD-RAM	6,750 KB/s
	Transfer Mode	Multiword DMA Mode	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	
HP Biometric Fingerprint Sensor (Optional)	Mobile Voltage Operation	3.0V–3.6V Single Supply	
	Operating Temperature	32° – 158°F (0° – 70°C)	
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling	
		Less than 25 mA hardware finger detection	
		Advanced Power Management	
	High-Rate Image Capture	Up to 240 image frames /sec	
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)	
	Detection Matrix	192 x 16 Pixels	
		9.7mm x 0.81mm	
		500 ppi High-Resolution Images	

### Audio

<b>Hardware</b>	<b>Implementation</b>	ADI1981HD High Definition CODEC
	<b>Volume Controls</b>	Up, down, and mute buttons
	<b>Full Duplex</b>	Yes
	<b>Sound Blaster Pro compatible</b>	Yes
	<b>Microphone Jack</b>	Stereo or mono
	<b>Headphone/Line Out Jack</b>	Stereo

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48 kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Internal Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

<b>Integrated Broadcom NetXtreme Gigabit Ethernet PCI Express Controller (BCM5753M)</b>	<b>Ethernet Features</b>	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)
		100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)
		1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)
		Auto-Negotiation (Automatic Speed Selection)
		Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s
		IEEE 802.1p QoS (Quality of Service) Support
	<b>Power Management</b>	IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
		ACPI compliant -- multiple power modes
		Situation-sensitive features reduce power consumption
	<b>Performance Features</b>	NIC Battery Saving Mode (enabled by default)
		TCP/IP/UDP Checksum Offload (configurable)
		TCP Segmentation Offload
		CPU Task Offload
		Adaptive Interrupts

Technical Specifications

	<b>Manageability</b>	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Cable Analyzer
	<b>Interface</b>	PCI Express x1
	<b>NIC Device Driver Name</b>	Broadcom NetXtreme Gigabit Ethernet
	<b>Drivers Available</b>	Microsoft Windows XP Microsoft Windows 2000
V.92 56K Data/Fax Modem	<b>Form Factor</b>	MDC 1.5 Daughtercard
	<b>Power Management Support</b>	APM Revision 1.2, ACPI
	<b>Approvals/Certifications</b>	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	<b>Data Mode Capabilities</b>	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) <b>Optional symbol rates:</b> 2800, 3429 Asymmetric Symbol rates <b>Synchronous primary channel data signaling rates:</b> 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
	<b>Fax Mode Capabilities</b>	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2

### Technical Specifications

<b>Command Set</b>	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251
--------------------	--

#### Broadcom 4311BG 802.11b/g WiFi Adapter

<b>Wireless LAN Standards</b>	IEEE 802.11b IEEE 802.11g
<b>Interoperability</b>	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at <a href="http://www.hp.com/go/notebooks/WLAN">www.hp.com/go/notebooks/WLAN</a> )
<b>Frequency Band</b>	2.4 GHz
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
<b>Output Power (for CCK)<sup>2</sup></b>	17.5 dBm
<b>Output Power (for OFDM; power varies by data rate)<sup>2</sup></b>	15 dBm
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode <sup>3</sup> : 390 mW (nominal) Sleep mode: 20 mW (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity<sup>4</sup></b>	54 Mbps: -72 dBm, 11 Mbps: -88 dBm, 1 Mbps: -97 dBm
<b>Antenna type</b>	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
<b>Range</b>	802.11 b – Typical (@1 Mbps) 1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment  802.11 g – Typical (@1 Mbps) 1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment

### Technical Specifications

Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility <sup>5</sup>	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> <li>• Microsoft Windows XP Wireless Network Connection Manager</li> <li>• Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)</li> </ul>	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. In Power Save Polling mode.</li> <li>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.</li> </ol>	

#### Broadcom 4311AG 802.11a/b/g WiFi Adapter

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at <a href="http://www.hp.com/go/notebooks/WLAN">www.hp.com/go/notebooks/WLAN</a> )
Frequency Band	2.4 GHz and 5 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
Security <sup>1</sup>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture	Ad-hoc (Peer to Peer)
Models	Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points

<b>Output Power</b> (for CKK) <sup>2</sup>	17.5 dBm							
<b>Output Power</b> (for OFDM; 15 dBm power varies by data rate) <sup>2</sup>								
<b>Power Consumption</b>	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode <sup>3</sup> : 390 mW (nominal) Sleep mode: 20 mW (max)							
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode							
<b>Receiver Sensitivity</b> <sup>4</sup>	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm							
<b>Antenna type</b>	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure							
<b>Range</b>	<table><tr><td>802.11 a – Typical (@6 Mbps)</td><td>600 feet – Outdoor Open Area 150 feet – Indoor, Office environment</td></tr><tr><td>802.11 b – Typical (@1 Mbps)</td><td>1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment</td></tr><tr><td>802.11 g – Typical (@1 Mbps)</td><td>1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment</td></tr></table>		802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment							
802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment							
802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment							
<b>Form Factor</b>	PCI-Express MiniCard							
<b>Weight</b>	0.026 lb (12 g)							
<b>Dimensions</b>	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)							
<b>Operating Voltage</b>	3.3v +/- 10%							
<b>Temperature</b>	<table><tr><td>Operating</td><td>32° to 176° F (0° to 80° C)</td></tr><tr><td>Non-operating</td><td>-40° to 176° F (-40° to 80° C)</td></tr></table>		Operating	32° to 176° F (0° to 80° C)	Non-operating	-40° to 176° F (-40° to 80° C)		
Operating	32° to 176° F (0° to 80° C)							
Non-operating	-40° to 176° F (-40° to 80° C)							
<b>Humidity</b>	<table><tr><td>Operating</td><td>10% to 90% (non-condensing)</td></tr><tr><td>Non-operating</td><td>5% to 95% (non-condensing)</td></tr></table>		Operating	10% to 90% (non-condensing)	Non-operating	5% to 95% (non-condensing)		
Operating	10% to 90% (non-condensing)							
Non-operating	5% to 95% (non-condensing)							
<b>Altitude</b>	<table><tr><td>Operating</td><td>0 to 10,000 ft (3,048 m)</td></tr><tr><td>Non-operating</td><td>0 to 50,000 ft (15,240 m)</td></tr></table>		Operating	0 to 10,000 ft (3,048 m)	Non-operating	0 to 50,000 ft (15,240 m)		
Operating	0 to 10,000 ft (3,048 m)							
Non-operating	0 to 50,000 ft (15,240 m)							
<b>Configuration Utility</b> <sup>5</sup>	Choice of Configuration Utility: <ul style="list-style-type: none"><li>• Microsoft Windows XP Wireless Network Connection Manager</li><li>• Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)</li></ul>							
<b>LED Activity</b>	LED Off – Radio OFF; Solid LED On – Radio ON							

1. Check latest software/driver release for updates on supported security features.

2. Maximum output power may vary by country according to local regulations.

3. In Power Save Polling mode.

4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11 b (CKK modulation) and a packet error rate of 10% for 802.11 a/g (OFDM modulation).

5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.

Page 31

### Technical Specifications

<b>Interoperability</b>	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at <a href="http://www.hp.com/go/notebooks/WLAN">www.hp.com/go/notebooks/WLAN</a> )	
<b>Frequency Band</b>	2.4 GHz and 5 GHz	
<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps	
<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM	
<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP- MSCHAPv2, LEAP, EAP-FAST, EAP-SIM.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.	
<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK	
<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
<b>Roaming</b>	IEEE 802.11 compliant roaming between access points	
<b>Output Power (for CCK)<sup>2</sup></b>	15 dBm	
<b>Output Power (for OFDM; power varies by data rate)<sup>2</sup></b>	15 dBm	
<b>Power Consumption</b>	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode <sup>3</sup> : 150 mW (nominal) Sleep mode: 30 mW (max)	
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode	
<b>Receiver Sensitivity<sup>4</sup></b>	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
<b>Antenna type</b>	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
<b>Range</b>	802.11 a – Typical (@6 Mbps)  802.11 b – Typical (@1 Mbps)  802.11 g – Typical (@1 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment  1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment  1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
<b>Form Factor</b>	PCI-Express MiniCard	
<b>Weight</b>	0.013 lb (6 g)	
<b>Dimensions</b>	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
<b>Operating Voltage</b>	3.3v +/- 10%	
<b>Temperature</b>	Operating Non-operating	32° to 176° F (0° to 80° C) -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)



### Technical Specifications

Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility <sup>5</sup>	Choice of Configuration Utility:	
	<ul style="list-style-type: none"> <li>• Microsoft Windows XP Wireless Network Connection Manager</li> <li>• Intel PROSet (required for Cisco Compatible Extensions support)</li> </ul>	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. In Power Save Polling mode.</li> <li>4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.</li> </ol>	

HP Integrated Module with Bluetooth Wireless Technology	Bluetooth Specification	2.0 Compliant
	Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
	Frequency Band	2402 to 2480 MHz
	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps
		Synchronous Connection Oriented links up to 3, 64 kbps, voice channels
		Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
	Power Consumption	Peak (Tx) 264 mW
		Peak (Rx) 231 mW
		Sleep <1 mW
	Antenna	Internally integrated within module
	Range	Up 33 ft (10 m)
	Electrical Interface	USB 2.0 compliant
		Microsoft Windows Plug and Play compliant
	OS Support	Microsoft Windows XP Professional and Home
		Microsoft Windows 2000
	Bluetooth Software Supported	Broadcom Bluetooth for Windows
		Microsoft Windows XP Bluetooth Software
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
	Security	Full support of Bluetooth Security Provisions
	Power Management	Microsoft Windows ACPI, and USB Bus Support
		Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
	Certifications	All necessary regulatory approvals for supported countries, including:
		FCC (47 CFR) Part 15C, Section 15.247 & 15.249
		ETS 300 328, ETS 300 826

Technical Specifications

	Low Voltage Directive IEC950	
	UL, CSA, and CE Mark	
Temperature	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90%
	Non-operating	5% to 95%
Altitude	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software)	
	Serial Port Profile (SPP)*	
	Dial-Up Networking (DUN)*	
	Generic Object Exchange Profile (GOEP)	
	Object Push Profile (OPP)*	
	File Transfer Profile (FTP)	
	Synchronization Profile (SYNC)	
	Hard Copy Cable Replacement (HCRP)*	
	Personal Area Networking Profile (PAN)*	
	Human Interface Device Profile (HID)*	
	FAX Profile (FAX)	
	Basic Imaging Profile (BIP)	
	Headset Profile (HSP)	
	Hands Free Profile (HFP)	
	Advanced Audio Distribution Profile (A2DP)	

\* indicates the profile is also supported by Microsoft Windows XP SP2

Environmental Data	Eco-Label Certifications	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: <ul style="list-style-type: none"><li>• US Energy Star</li><li>• US Federal Energy Management Program (FEMP)</li><li>• Taiwan Green Mark</li><li>• China Energy Conservation Program</li><li>• IT ECO declaration</li></ul>
	System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook."

### Technical Specifications

<b>Energy Consumption</b>	<b>115 VAC</b>	<b>230 VAC</b>	<b>100 VAC</b>
Normal Operation	23 W	23.5 W	23 W
Sleep (Energy Star low power mode)	1.72 W	1.88 W	1.73 W
Off	1.90 W	1.98 W	1.90 W
<b>Heat Dissipation*</b>	<b>115 VAC</b>	<b>230 VAC</b>	<b>100 VAC</b>
Normal Operation	78.5 BTU/hr	80.2 BTU/hr	78.5 BTU/hr
Sleep	5.9 BTU/hr	6.4 BTU/hr	5.9 BTU/hr
Off	6.5 BTU/hr	6.8 BTU/hr	6.5 BTU/hr

**\*NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)	<b>Sound Power</b> (LWAd, bels)	<b>Sound Pressure</b> (LpAm, decibels)
System Fan Off		
Idle	3.0	28.0
Fixed Disk (random writes)	3.9	33.8
Optical Drive (sequential reads)		34.0
System fan is usually off except when charging the battery.		
System Fan On		29.0
Idle		34.0
Fixed Disk (random writes)		42.0

#### Batteries

This product complies with ISO standards:

EU Directive 91/ 157/ EEC  
EU Directive 93/ 86/ EEC  
EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

Mercury greater than 5ppm by weight  
Cadmium greater than 10ppm by weight  
Lead greater than 4000 ppm by weight.

Battery type and chemistry used in the product:

Primary battery  
8-cell high capacity extended life Lithium-Ion battery

Real Time Clock battery  
CR2032 (coin cell), Lithium

### Technical Specifications

#### Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412

Input devices of this product comply with ISO 9241, part 9.

Plastics parts weighing over 0.055 pounds (25 grams) used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% recycled materials (by wt.)

This product is greater than 85% recycle-able when properly disposed of at end of life.

#### Packaging

##### Packaging Materials

- External:
  - Corrugated Paper – 2.03 lb (920 g)
- Internal:
  - EPE Foam – 0.59 lb (266 g)
  - LDPE Bag – 0.03 lb (14 g)
  - Corrugated/Paper – 0.46 lb (210 g)
- The plastic packaging material is made from 0% recycled content.
- The corrugated paper packaging materials contains at least 80% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

### Technical Specifications

#### Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

[http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### End-of-life Management and Recycling

HP offers our customers several other options for handling their aging computers while also minimizing the impact on the environment-including product trade-in and leasing services-in addition to recycling services. Please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

## *Technical Specifications*

Copyright © 2006 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core Duo, Centrino, and SpeedStep are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.